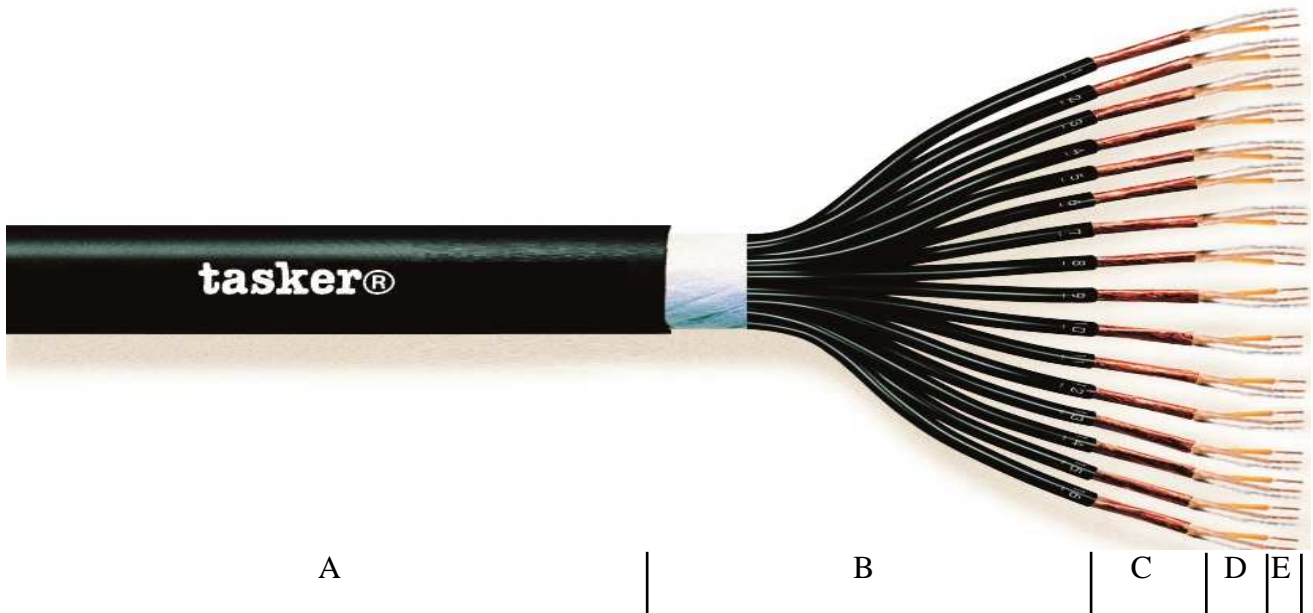

RoHS₂
 2002/95/EC
 2011/65/UE

Technical Datasheet

tasker® C424 – 24x2x0,22 mm²

Single Shielded Multipair Audio Cable



NOTE The picture don't represent the real number of conductors

CATEGORY Multipair Audio Cable (See Audio Catalogue)

APPLICATIONS Audio Mixers, Benches and Audio Balanced multi sockets.

- A:** Soft Black **PVC** Sheath.
Outer cable Diam. Ø: 19,00 (±0,10) mm.
- B:** The single pair are isolated with black **PVC**, numbered from one to the number of elements and wrapped together with polyester base tape.
Diam. Ø 3,00 (±0,10) mm.
- C:** The single pair are shielded with spiral in O.F.C. red copper, covering 100% + tinned copper Drain Wire.
- D:** The single cores are insulated with **Solid PE**, colored one Yellow and one Transparent, and wrapped with not weaved polyester base tape.
Diam. Ø 1,00 (±0,10) mm.
- E:** O.F.C. red copper formation 28x0,10 mm.
Nom. Cross section 24x2x0,22 mm².

MARKING

tasker® C424 24x2x0,22mm² Professional Multipair Cable for Audio Mixer – Made in Italy

CUSTOM PRODUCTION

This product may be custom produced also in **L.S.Z.H.** polymer, **PE, PUR**, with or without Metallic Armor.

Cable Properties

Conductor Resistance	79,15 Ω/Km
Capacity Core/Core	75 pF/mt
Capacity Core/Shield	160 pF/mt
Velocity of Propagation	66%
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			