




□





• **What is the purpose of the study?**

(G)

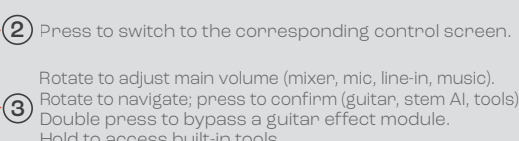

Hold to access built in tools.

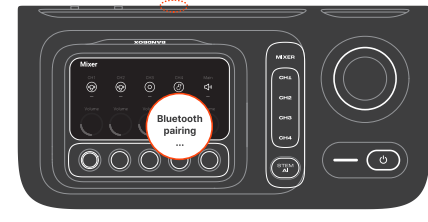

Press to switch between your favorite guitar presets saved in app



②





11



* If amber light flashes, check slider switch or adjust instrument gain until light turns green.



Downloaded from <http://ajph.org/> on November 10, 2015



Headphone output:	Max 1 Vrms, supporting 16 ohm and 32 ohm impedance headphones	frequency range:	2.4 GHz - 2.4835 GHz
Lineout output:	Max 1 Vrms, 2 channels output to secondary speaker (Aux-in)	Bluetooth® transmitter power:	< 13 dBm (EIRP)
Power input:	AC 100 - 240 V ~ 50 / 60 Hz or 5 V / 12 V / 15 V / 20 V DC, 3 A MAX.	Bluetooth® transmitter modulation:	GFSK, π/4 DQPSK, 8DPSK
		Input sensitivity:	
		• Aux-in line-in:	370 mV rms

Frequency response:	50 Hz - 20 kHz (-6 dB)	• Aux-In/Line in:	500 mV rms
Signal-to-noise ratio:	> 80 dB	• Mic-In:	20 mV rms
Battery type:	Li-ion 68 Wh (equivalent to 7.2 V / 9444 mAh)	• Guitar-In:	100 mV rms
		Bluetooth/USB input:	-9 dBFS

