

## Portable Speakers

# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

- 2 way full range loudspeaker for portable PA and installation applications
- 2,500 Watt power featuring KLARK TEKNIK Class-D technology
- KLARK TEKNIK Digital Signal Processing for total system control
- Speaker modelling includes accurate models of industry standard speakers
- SCC (Spatial Contour Control) compensates frequency response in relation to physical speaker placement
- ULTRANET digital audio networking connects to mixers and other sources
- 8" low frequency driver with low mass voice coil for improved transient response
- High temperature 1" compression driver with copper-clad aluminium voice coil for extended high frequency reproduction
- Fully featured user interface with LCD display for ease of navigation
- PC remote control software downloadable at [turbosound.com](http://turbosound.com)
- Lightweight fibre glass reinforced composite enclosure
- Rugged powder coated perforated steel mesh grille
- Dual angle pole mount for accurate audience coverage
- Multiple internal rigging points for installation applications
- Mains input and link output on Neutrik powerCON\* connectors
- 3-Year Warranty Program\*\*
- Designed and engineered in England

\*All third-party trademarks are the property of their respective owners. Their use neither constitutes a claim of the trademark nor affiliation of the trademark owners with MUSIC Group. Product names are mentioned solely as a reference for compatibility, effects and/or components.

\*\*Warranty details can be found at [music-group.com](http://music-group.com).



The 2,500-Watt iQ10 is a powered two-way loudspeaker ideally suited for a wide range of portable and fixed installation, music and speech sound reinforcement applications. The driver complement includes an 10" low frequency driver with a low mass voice coil for improved transient response, and a high temperature 1" compression driver with copper-clad aluminium voice coil for extended high frequency reproduction.



Equipped with a very efficient and lightweight two channel KLARK TEKNIK Class-D power amplifier, the iQ10 provides an impressive 2,500 Watts of output power. A high degree of control over the loudspeaker system's performance is managed by a sophisticated, but easy to use KLARK TEKNIK Digital Signal Processor (DSP), which provides dynamic EQ for remarkable full range response at low volume levels, and transparent limiting for the utmost clarity at high output levels – and long-term reliability. iQ10's advanced DSP speaker modelling presets include detailed and accurate models of some of the audio industry's most-respected loudspeakers.

KLARK TEKNIK also developed a highly versatile Spatial Contour Control (SCC) DSP function, which allows the user to easily optimise the iQ10's frequency response for the physical speaker placement. This advanced functionality provides frequency compensation for stand, floor, wall or ceiling placement, much like the adjustments commonly found on studio reference monitors.

# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

On the rear panel amplifier module, you will find a fully featured user interface consisting of an LCD display, the Channel A and B gain controls, and a single rotary encoder for intuitive access to level, EQ, Speaker modelling, SCC, Subwoofer Integration and Feedback Control (FBI). In addition to the two combination balanced XLR/jack inputs, balanced XLR outputs for each of the two independent channels, and a Mix Out XLR connector, the iQ10 features a mic/line switch and level control with signal present LED on each channel.

The iQ10 also features our proprietary ULTRANET technology, which allows the use of CAT5 cables for transmitting pristine multi-channel audio signals and other information between ULTRANET-enabled products, such as digital mixers and personal monitor systems. This digital distribution networking not only eliminates the potential for RFI and crosstalk so common to analogue methods, but also significantly reduces the setup or installation time required. An onboard USB port provides access for remote control of the iQ10 via PC computer, as well as DSP and speaker modelling firmware updates.


The lightweight fibre glass reinforced composite enclosure is fitted with a rugged powder coated perforated steel mesh grille and multiple internal rigging points for permanent installations. The iQ10 is also fitted with a dual angle pole mount socket, allowing the enclosure to be pole mounted straight on, or raised and angled downwards for optimal audience coverage. Mains power input and link output is provided via Neutrik powerCON\* connectors.

Portable Speakers

# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

## Frequency Response Sensitivity 1 W / 1 m

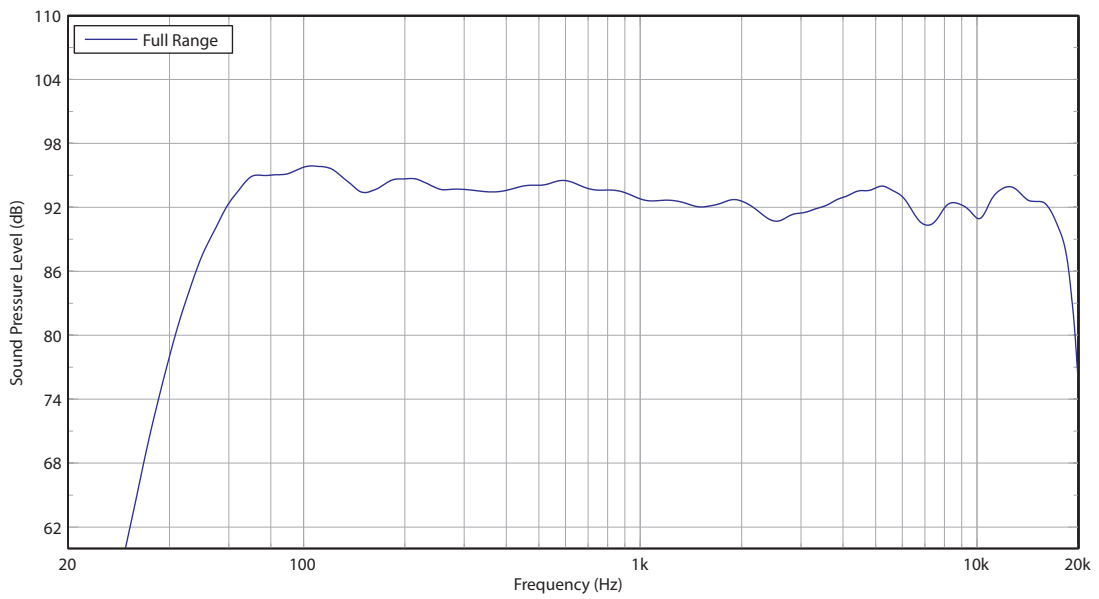


## Portable Speakers


# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

### Horizontal Beamwidth

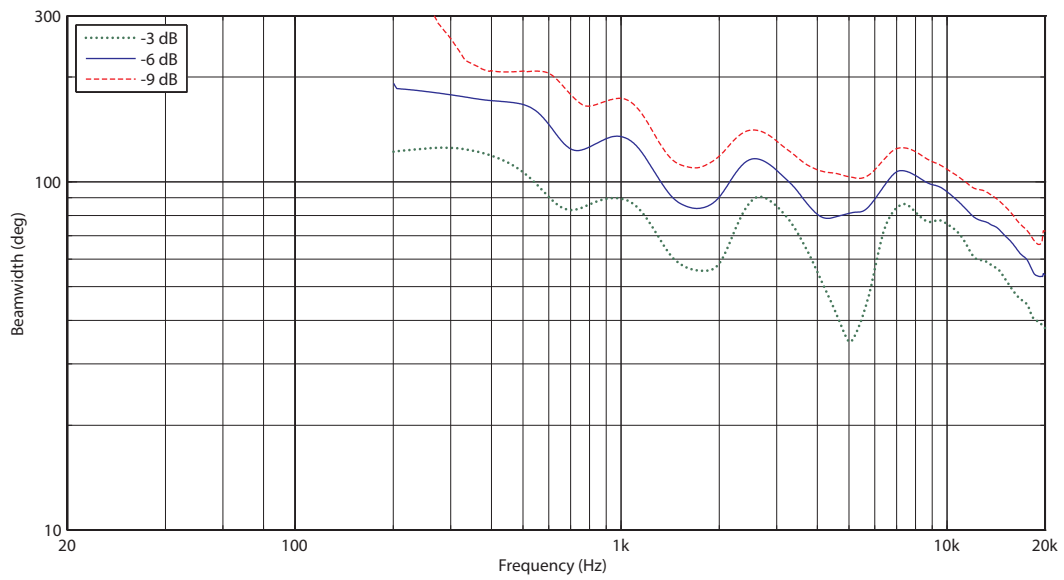

### Vertical Beamwidth





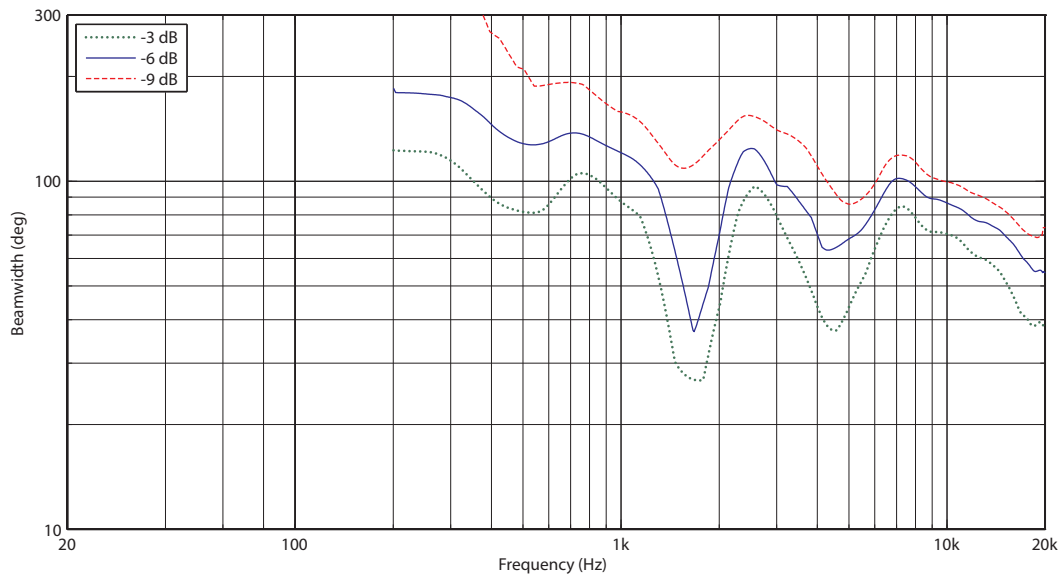


## Portable Speakers

# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

### Horizontal Polar Plots

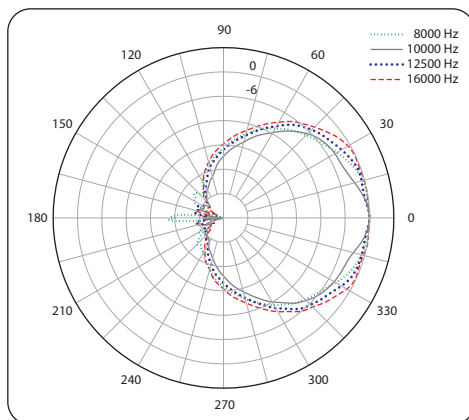
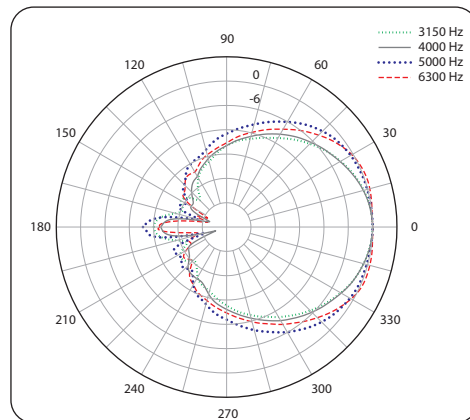
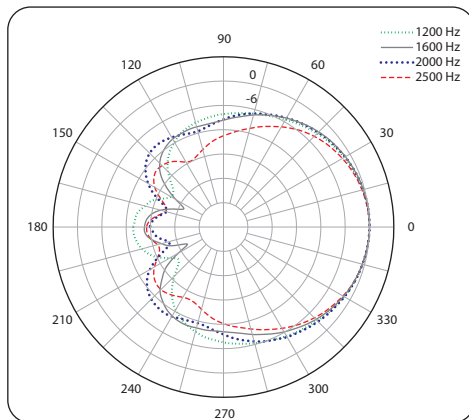
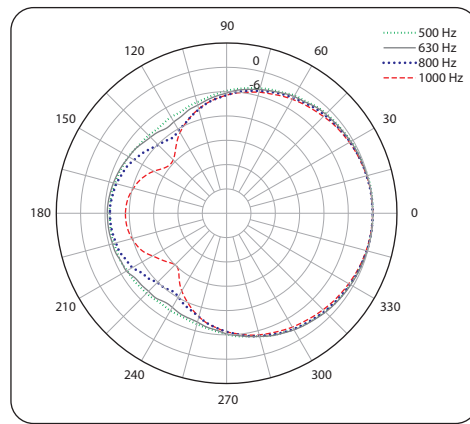
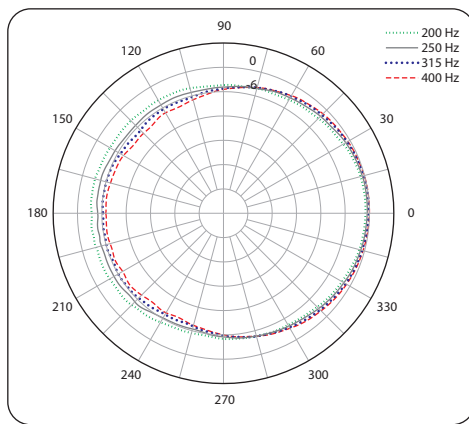


## Portable Speakers

# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

### Vertical Polar Plots


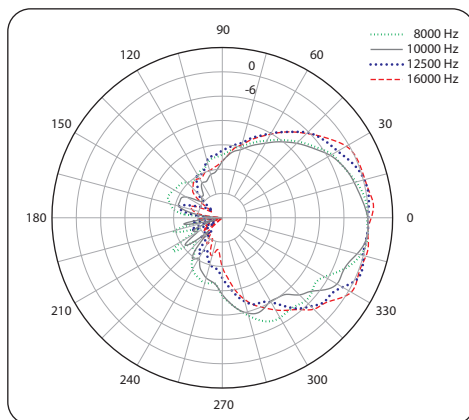
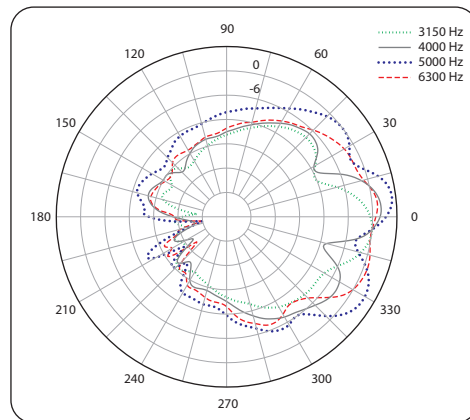
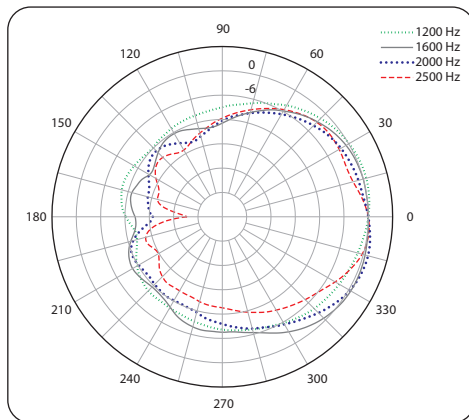
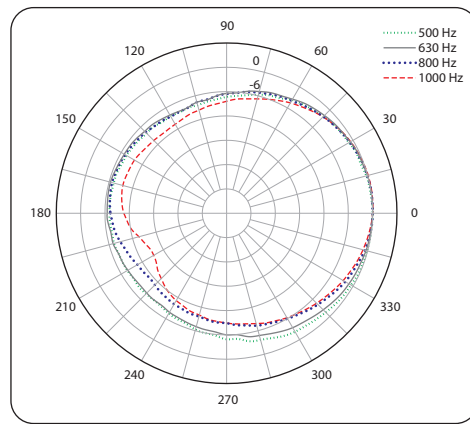
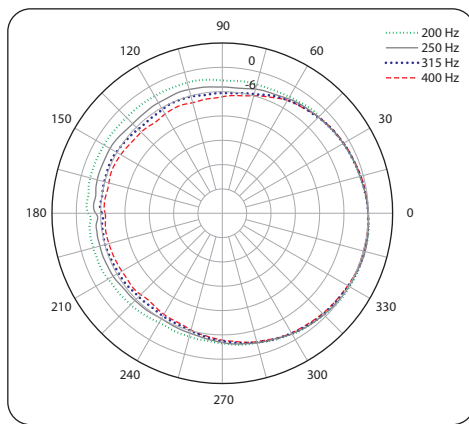


Portable Speakers

# iQ10

2,500 Watt 2 Way  
 10" Powered Loudspeaker with  
 KLARK TEKNIK DSP Technology,  
 Speaker Modelling and  
 ULTRANET Networking

## Dimensions

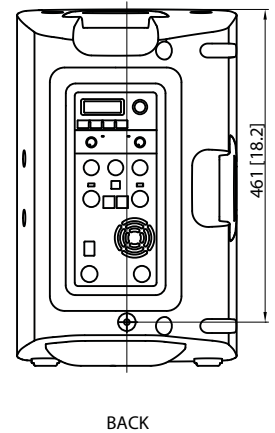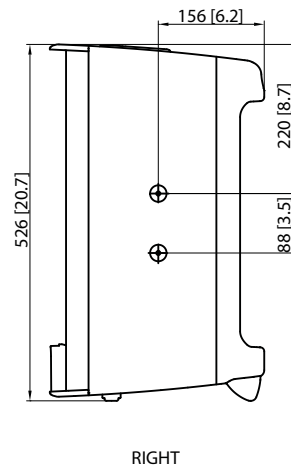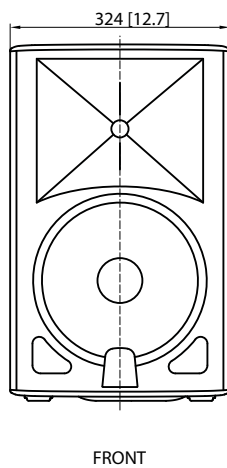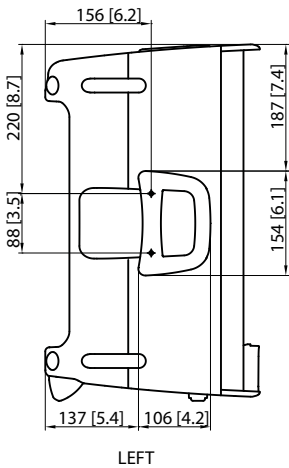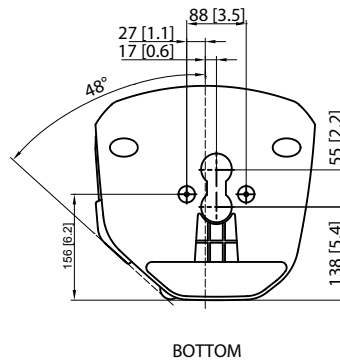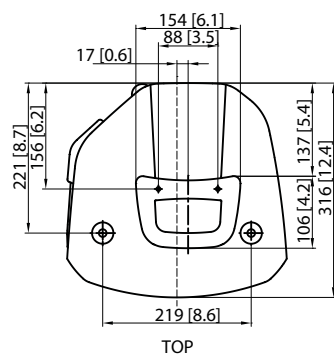

## Portable Speakers

# iQ10


2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

## Mounting and Rigging


The cabinet is fitted with M10 x 3 internally-threaded rigging points that allow it to be rigged with optional shoulder eyebolts in different configurations in permanent installations. The simplest method of rigging is to use the two M10 rigging points on the top, and a single pull-back rigging point on the rear panel. Adjustment of the length of the rear cable allows the cabinet to be angled for optimum room coverage.

The cabinet is fitted with a dual angle pole mount socket, allowing the enclosure to be pole mounted straight on, or raised and angled downwards for optimal audience coverage


The optional **iQ10-WB** wall bracket allows the cabinet to be surface mounted horizontally and vertically, and angled for optimum positioning and coverage.

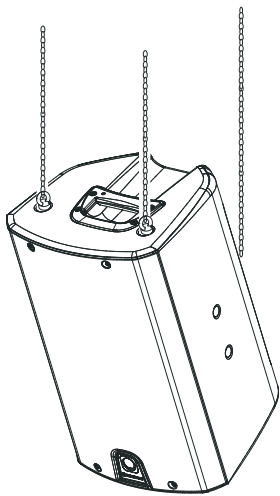


Suspension using M10  
shoulder eyebolts.

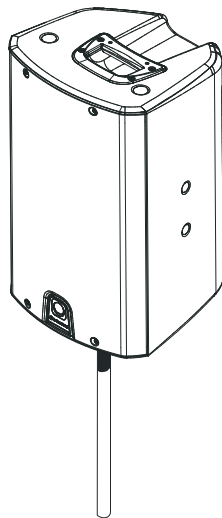

Mounting on 35 mm  
pole or speaker stand.

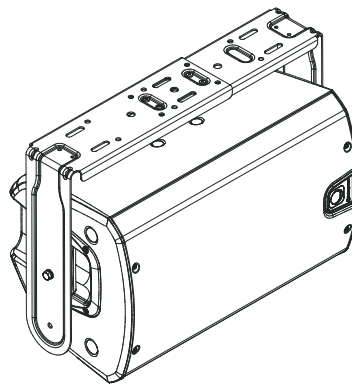

iQ10-WB wall bracket:  
horizontal mounting.

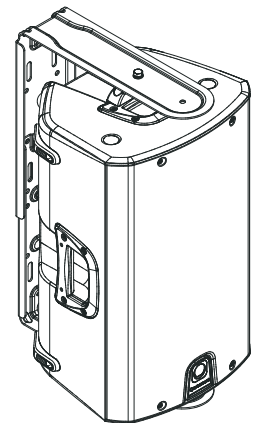

iQ10-WB wall bracket:  
vertical mounting.

## Portable Speakers

# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

## Technical Specifications

### System

Frequency response	55 Hz – 18 kHz $\pm$ 3 dB 50 Hz – 20 kHz -10 dB
Nominal dispersion	90° H x 60° V @ -6 dB points
Maximum SPL	129 dB peak
Crossover type	Active
Transducers	1 x 10" (256 mm) LF driver 1 x 1" (25.4 mm) HF compression driver
Limiter	Independent HF, LF, peak and rms

### Amplifier

Maximum output power*	2,500 W
Type	Class-D
Protection	Short circuit, open circuit, thermal

### Connectors

Input A / B	2 x combo jack/XLR
Sensitivity	Line +4 dBu, mic -22 dBu, switchable
Input impedance	20 k $\Omega$ unbalanced, 40 k $\Omega$ balanced
Maximum input level	+21 dBu
Output A / B	2 x XLR Linked to input
Mix output	XLR, balanced
Output impedance	100 $\Omega$ unbalanced, 200 $\Omega$ balanced
Ultranet input/link	2 x RJ45
Mains Supply	Neutrik powerCON input 20A and link 15A

### Controls

DSP	Rotary push-encoder Buttons for PROCESS, SETUP, EXIT, ENTER
Mixer section	2 x gain controls (channels A and B) 2 x Line/Mic switch

### User DSP Functions

Factory EQ presets	Positioning, Sound mode, Sound modeling, FBQ
Display	LCD 128 x 32, blue backlit
Delay	0 - 300 ms
Equalisation	High and low shelving EQ 2 x parametric EQ
Limiter	Zero attack input limiter
Presets	20 total presets, 19 user-definable
Crossover	High Pass L-R 24 dB/oct
Protection	Lock-out function for all settings

### Ultranet Digital Network

System Signal Latency	16 channels < 0.9 ms
Cabling Cables Cable length	Shielded CAT5 max. 246 ft / 75 m recommended

### Power Supply

Power consumption	150 W @ 1/3 max power
Voltage (fuses)	120 V~, 60 Hz (T 15 A H 250 V)
USA / Canada	220-240 V~, 50/60 Hz (T 10 A H 250 V)
UK / Australia / Europe	220-240 V~, 50/60 Hz (T 10 A H 250 V)
Korea / China	100 V~, 50/60 Hz (T 15 A H 250 V)
Japan	100 V~, 50/60 Hz (T 15 A H 250 V)

### Enclosure

Dimensions HWD	526 x 324 x 316 mm (20.7 x 12.7 x 12.4")
Net weight	17.2 kg (38 lbs)
Construction	Injection-moulded polypropylene enclosure
Finish	Black painted
Grille	Powder coated perforated steel
Flying hardware	M10 x 3 points

### Accessories


IQ10-WB Steel wall bracket

\*Independent of limiters and driver protection circuits

## Portable Speakers

# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking

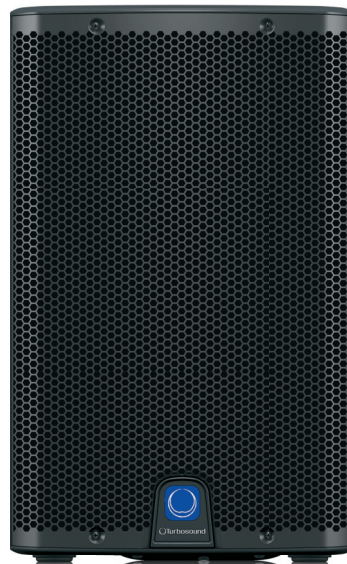

Portable Speakers

# iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking



# Portable Speakers

## iQ10

2,500 Watt 2 Way  
10" Powered Loudspeaker with  
KLARK TEKNIK DSP Technology,  
Speaker Modelling and  
ULTRANET Networking



For service, support or more information contact the TURBOSOUND location nearest you:

**Europe**  
**MUSIC Group Services UK**  
 Tel: +44 156 273 2290  
 Email: CARE@music-group.com

**USA/Canada**  
**MUSIC Group Services NV Inc.**  
 Tel: +1 702 800 8290  
 Email: CARE@music-group.com

**Japan**  
**MUSIC Group Services JP K.K.**  
 Tel: +81 3 6231 0454  
 Email: CARE@music-group.com

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, TURBOSOUND, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd. © MUSIC Group IP Ltd. 2015 All rights reserved.

