

286s Mic Preamp

Channel Strip Processor

dbx
by HARMAN



All the mic processing you need.

The dbx® 286s is a full featured Channel Strip Processor that delivers a studio quality microphone/instrument preamplifier and four processors that can be used independently or in any combination. Why mic up vocals and instruments through a noisy, blurry mixer? The sonically pristine dbx 286s Mic Preamp has all the features you need, including wide-ranging input gain control, switchable +48V phantom power, and an 80Hz high-pass filter to remove low frequency hum, rumble or wind. Use the patented dbx OverEasy® compressor to transparently smooth out uneven acoustic tracks or deliver that classic “in your face” vocal performance that only a dbx compressor can. Eliminate vocal sibilance and high frequency distortion from instruments such as cymbals with the frequency tunable De-Esser. Fine-tune the Enhancer HF Detail control to add sparkle and crispness to your tracks and make adjustments to the LF Detail control to add fullness and depth to vocals and bass instruments while cleaning up the muddy low midrange frequencies. And, the separate threshold and ratio controls on the Expander/Gate allow you to subtly reduce headphone leakage or radically gate noisy guitar amps.

The dbx 286s offers a full compliment of metering and status LEDs to visually guide you to achieving the right sound. The floating balanced XLR Mic Input accepts balanced or unbalanced inputs to easily connect to professional and home studio microphones. The additional 1/4" TRS Line Input can accept balanced/unbalanced signals to process live electronic instruments or pre-recorded tracks at mixdown. Use the Insert jack to interface between the Mic Preamp and the signal processing sections to “loop out” to external processors (such as EQ or delay unit) or to mix the Mic Preamp’s signal out to an external destination.

Features

- ▶ Studio quality Mic Preamp/Channel Strip Processor
- ▶ Classic dbx Compression puts great sound within easy reach
- ▶ Program adaptive Expander/Gate
- ▶ Frequency tunable De-Esser reduces sibilance and high frequency distortion
- ▶ Enhancer increases the detail and definition of the high and low frequencies
- ▶ Full compliment of meters and status LEDs
- ▶ Insert jack allows you to add an external processor
- ▶ +48V Phantom Power
- ▶ Precision detented controls

Who uses this product:



BROADCAST



LIVE SOUND



STUDIO

dbx Professional
Products

8760 S. Sandy Pkwy.
Sandy, Utah 84070

801.568.7660 PHONE
801.568.7662 FAX


801.568.7583 INT'L FAX
customer@dbxpro.com

www.dbxpro.com

dbx
by HARMAN

286s Mic Preamp

Channel Strip Processor

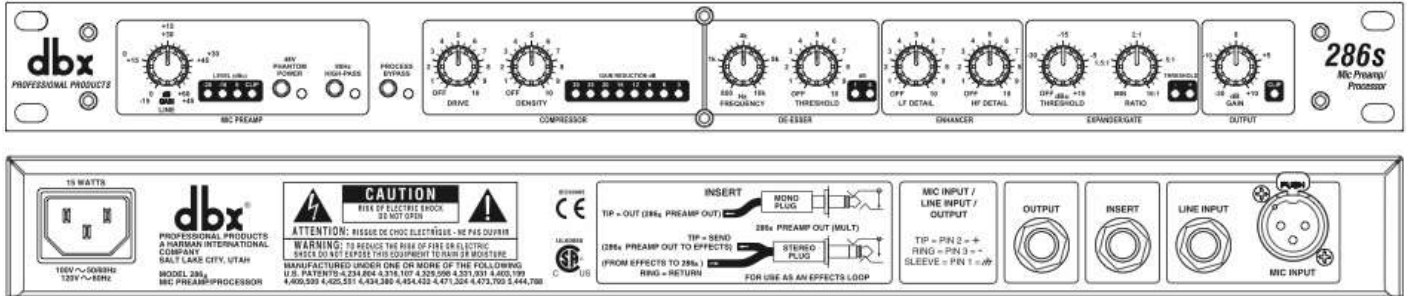

Specifications

MIC INPUT:

Floating balanced, Pin 2 Hot
Impedance ~ 4.2k Ω Balanced
Maximum Level 0.25Vrms, Gain = 30dB
Gain Adjustment Range +0dB to 60dB
Phantom Power +48VDC, applied to XLR pins 2 and 3 through 6.81k Ω resistors
CMRR >40dB, typically 55dB
EIN -125dBu, 22Hz-22kHz, 150 Ω source impedance

LINE INPUT:

Floating balanced, TIP Hot
Impedance 10k Ω unbalanced, 20k Ω balanced
Maximum Level >+21dBu, balanced or unbalanced
Gain Adjustment Range -15dB to +45dB
CMRR >40dB, typically 55dB

INSERT (1/4" TRS):

Normalised: tip is Send, ring is Return
Ring: Impedance >5k Ω
Maximum Level >+21dBu
Tip: Impedance 100 Ω
Maximum Level >+21dBu, >+20dBm (600 Ω load)
Noise <-89dBu, unweighted (20Hz-20kHz);
LINE GAIN Control set to 0dB
Distortion <0.01% THD, 20Hz-20kHz, +10dBu

LINE OUTPUT (1/4" TRS):

Balanced/Unbalanced
Impedance 100 Ω unbalanced, 200 Ω balanced
Maximum Level >+21dBu, >+20dBm (600 Ω load)
Gain Adjustment Range -30dB to +10dB
Noise <-85dBu unweighted (20Hz-20kHz); Both Gain Controls set for 0dB, all processing controls OFF
Frequency Response 20Hz - 20kHz, +0.5/-0.5dB
Distortion <0.08%THD, 20Hz-20kHz, +10dBu, all Processing Controls OFF

COMPRESSOR:

Threshold Range -40dBu to +20dBu
Threshold Characteristics OverEasy[®]
Compression Ratio >4:1 For input levels beyond 20dB above threshold
Maximum Compression 30dB

Attack Time

Program-Dependent; >1s for small level increases, down to 10ms for large increases
Release Time Program-Dependent; adjustable between approximately 1dB/Sec and 75dB/Sec
Distortion Typically <0.05%THD, 20Hz-20kHz, 15dB G/R, +10dBu Output, DENSITY @ 0
SMPT E Intermodulation Distortion <0.05%; 60Hz/7kHz 4:1, 15dB G/R, +10dBu Output Level, DENSITY @ 0

DE-SSER:

Characteristic Wideband Gain Reduction
Frequency Range 800Hz to 10kHz High Pass, 12dB/octave
Release Time Program-Dependent approximately 1ms/dB

ENHANCER:

HF Detail Characteristic Program-controlled shelving equalizer, approximately 15dB maximum HF boost
LF detail Characteristic Bell-shaped boost @ 80Hz, bell-shaped cut @ 250Hz, ratio is approximately 2:1

EXPANDER/GATE:

Threshold Range Off to +15dBu
Expansion Ratio Adjustable 1.5:1 to 10:1
Maximum Depth >50dB
Attack Time Program-Dependent, approximately 2ms (at maximum attenuation)
Release Time Program-Dependent, approximately 10ms/dB

DYNAMIC RANGE:

Typically 105dB

POWER SUPPLY:

Power Requirements 15 Watts
Operating Voltage USA: 120VAC 60Hz, 100VAC 50/60Hz;
EU: 230VAC 50/60Hz
Operating Temperature 0°C to 45°C (32°F to 113°F)

PHYSICAL:

Dimensions 1.75" x 5.75" x 1.9" (4.5cm x 14.6cm x 48.5cm)
Weight Net Weight: 4.5 lbs/2.04 Kg
Shipping Weight: 6.54 lbs/2.97 Kg

dbx engineers are constantly working to improve the quality of our products. Specifications are, therefore subject to change without notice.

dbx Professional
Products

8760 S. Sandy Pkwy.
Sandy, Utah 84070

801.568.7660 PHONE
801.568.7662 FAX

801.568.7583 INT'L FAX
customer@dbxpro.com

www.dbxpro.com